

OUTDOOR SPORTS FLOORING

SPORTFLOOR-EX FAST

Outdoor resilient acrylic sports flooring system ideal for tennis, basketball, volleyball, handball, football courts, as well as any other outdoor sports court.

Combination of wet-pour acrylic coatings in total average thickness of 1.2mm.

Classified system by the International Tennis Federation (I.T.F) - Class 5.

Steps:

1. RITIVEX R LIQUID 1102 - Acrylic primer.



Used as primer of acrylic coatings, such as **ELASTOSPORT 853**, **SUPER ELASTOCOAT 842**, **ELASTOTURF 851** or **ELASTOMARK 818**. Applied by airless sprayer or brush.

2. ELASTOSPORT 853-COLORED - Acrylic, colored, one component, smoothing and repairing wet-pour resurfacer for sports flooring systems.

Consists of acrylic resins, quartz sand and special improver. It is applied by squeegee on smooth, compact road-grade asphalt, seals the porosity of the asphalt and in parallel smooths out the surface. Highly resistant to adverse weather conditions (snow, frost, heat waves etc.) after drying.

3. ELASTOTURF TOP - Acrylic, special top coating for sports flooring systems.

One component, acrylic resin with easy application, which provides a safe and high quality game. Applied by squeegee and short-haired mohair roller.

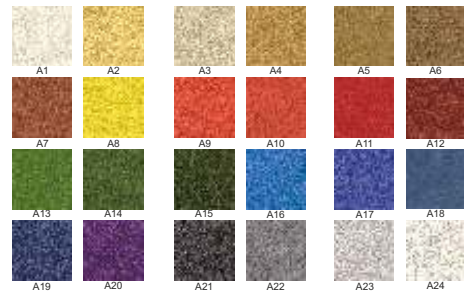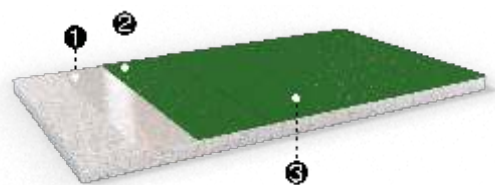

Description	Consumption
RITIVEX R LIQUID 1102 - Acrylic primer.	0.2-0.3kg/m ² for 1 layer
ELASTOSPORT 853 COLORED - Acrylic, colored, one component, smoothing and repairing wet-pour resurfacer for sports flooring systems.	1kg/m ² for 2 layers
+ Quartz sand, 0.3-0.5mm	1kg/m ² for 2 layer
ELASTOTURF TOP - Acrylic, special top coating for sports flooring systems.	0.3-0.35kg/m ² for 1 layer